


PART NUMBER


SSP-CN0

REV.

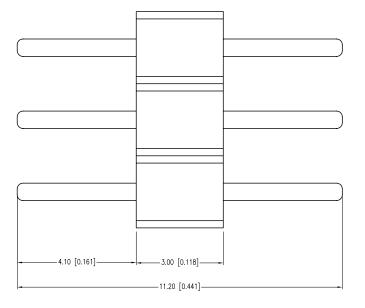

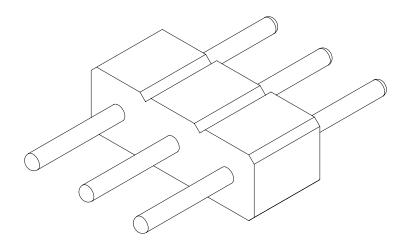





*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+DECIMAL}_{-0.00}$ PRECISION MAX.= $^{+0.00}_{-0.00}$ MAX.= $^{+0.00}_{-0.00}$ PRECISION ARE: X=±1 (±0.039), X.XX=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+DECIMAL}_{-0.00}$ PRECISION MAX.= $^{+0.00}_{-0.00}$ PRECISION MAX.= $^{+0.00}_{-0.00$ LINICONTROLLED DOCLIMENT

Creating LED and LCD Solutions Together™ WEB: WWW.LUMEX.COM

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

FLUSH CONNECTOR FOR LED LIGHT BAR.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

1	UNCONTROLLED DUCUMENT			
	DATE:	07.13.11	DRAWN BY:	AB
	PAGE:	1 OF 1	CHKD BY:	KF
	SCALE:	NTS	APRVD BY:	DT
	UNIT: mm [INCH]		Po	