



		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	FIRST RELEASE	Sep.07,2015	Drack	Tommy



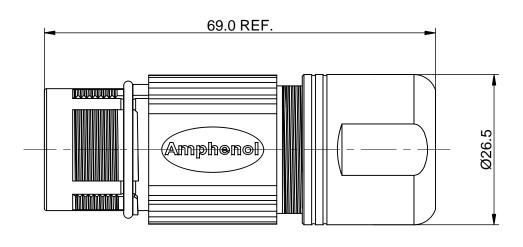

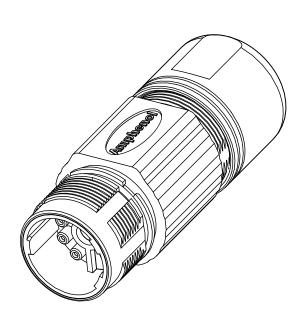

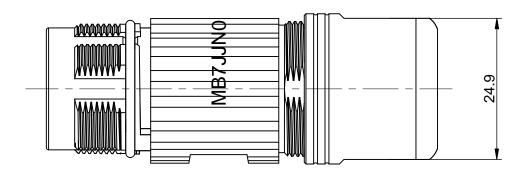

Item	Part number	Cable OD Range
1	MB7JJN0800-S1	7.5~11.0 mm
2	MB7JJN0800-S2	11.0~14.5 mm
3	MB7JJN0800-S3	14.5~17.0 mm

1. MATERIAL:

INSULATION INSERT:PA66,UL94 V0 SEAL: VITON, SILICONE, EPDM HOUSING BODY: ZINC DIE CAST, NICKEL PLATED

2. SPECIFICATIONS:

2.1 CURRENT RATING: SIGNAL: 10 AMPS

POWER: 30AMPS 2.2 VOLTAGE RATING: SIGNAL: 250V AC/DC

POWER: 630V AC/DC

2.3 OPERATING TEMPERATURE: -20°C TO +130°C

2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ SIGNAL: 2500VOLTS AC. POWER: 6000 VOLTS AC.

M23B,RECEPTACLE,STR,8POS(4+4)

MB7JJN0800-Sx

2.5 DEGREE OF PROTECTION: IP67 (MATED CONDITION)

2.6 DEGREE OF POLLUTION: 3 PER UL840 2.7 OVERVOLTAGE CATEGORY: III PER UL840

2.8 MATING CYCLE DURABILITY: >500 CYCLES

2.9 RoHS COMPLIANT

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

SEE PART NUMBER									
	0==:/::								
QUANTITY	TY PART NUMBER		DESCRIPTION		ITEM				
MATERIALS LIST									
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64		SIGNATURES	S DATE	Amphenol					
		Drack Drack	Sep.07,2015						
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:		Sine Systems - www.amphenol-sine.com					
3) Note reference = \(\times \) MATERIAL SPECIFICATIONS: PROCESS SPECIFICATIONS: NEXT ASS'Y:		ENGINEER:		44724 Morley Drive Clinton Township, MI 48036					
		APPROVAL:							
		CUSTOMER:	•	M23B,RECEPTACLE,STR,8POS(4+4)					
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL							
				B C-	MB7JJN08	00-Sx	A1		
				SCALE: NONE		SHEET 1	of 1		