


**RNF-100 Microtubing
Flexible Polyolefin,
Heat - Shrinkable Tubing**

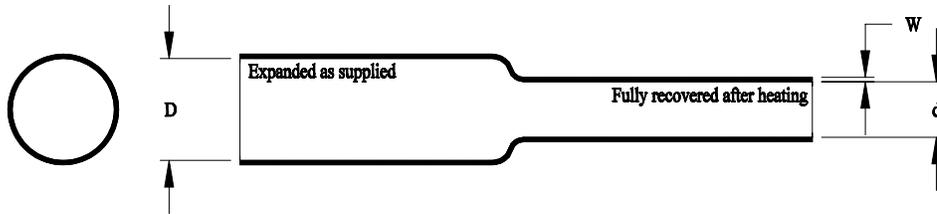

This specification covers the requirements for one type of single wall, electrical insulating, extruded tubing whose diameter will reduce to a predetermined size upon application of heat in excess of 121° C (250° F).

The tubing is fabricated from flexible polyolefin crosslinked by irradiation. It shall be homogenous and essentially free from flaws, defects, pinholes, seams, cracks or inclusions.

Table 1: Dimensions (inches)

Size	As Supplied	Recovered	
	Expanded I.D. Minimum (D)	Recovered I.D. Maximum (d)	Recovered Wall Thickness (W)
No. 300	.022	.013	.010 ± .002
No. 301	.032	.016	.015 max
No. 302	.032	.016	.009 ± .002

Specification Control Drawing

tyco <i>Electronics</i>	Tyco Electronics Corporation 300 Constitutional Drive Menlo Park, CA 94025 USA		Raychem	Title: RNF-100 Microtubing Flexible Polyolefin, Heat - Shrinkable Tubing		
	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application			Document No : RNF-100 Microtubing		
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 30-Oct-96	Rev.: C	Sheet: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.