




6 to 18 GHz Wilkinson Power Divider

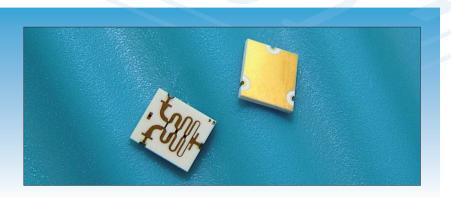

Typical Measured Return Loss

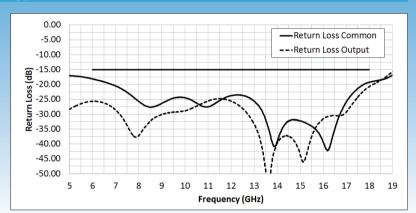

Typical Measured Isolation and Insertion Loss

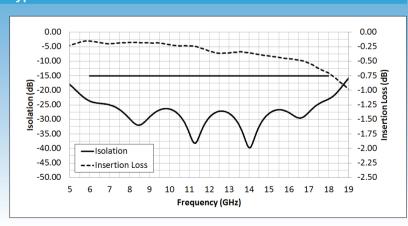

Part number: PDW05758

Description

DLI introduces its new high frequency surface mountable Wilkinson Power Divider. The power divider utilizes DLI's high dielectric ceramic material which provides small size and minimal performance variation over temperature. The compact size, broad band performance and ease of integration make this power divider ideal anywhere board space is of a premium and quality signal splitting or combining is required.

Features

- Broad Band 6 to 18 GHz Performance
- 0.7dB Typical Insertion Loss
- 20dB Typical Isolation and Return Loss
- Excellent Phase and Amplitude Balance
- Compact Solder Surface Mount Package

Specification

Electrical

Frequency Range (GHz)

6 to 18

Nominal Power Splitting (dB)

3.0 (typical)

Nominal Phase Shift (degrees)

0.0 (typical)

Amplitude Balance (dB)

±0.025 max.

Phase Balance (degrees)

±3.0 (max.)

Excess Insertion Loss (dB)

0.7 (typical)

Return Loss (dB)

20 (typical)

Isolation (dB) 20 (typical)

Input Power as a Splitter (W)²

5 (max.)

1) Electrical Specifications at 25°C; Over Temperature Performance TBD.


2) Load VSWR not to Exceed 1.20: 1.00; Base Temperature not to Exceed 85°C.



K knowles

www.knowlescapacitors.com

Recommended PCB Layout Dimensions

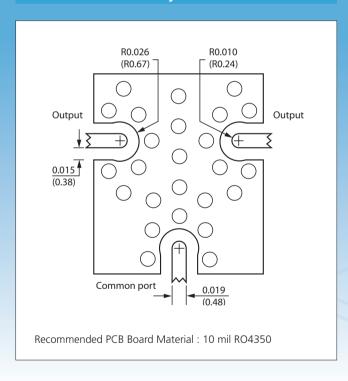

Oualifications









Dielectric Laboratories, Inc 2777 Route 20 East, Cazenovia, NY 13035 USA



Phone: +1 315 655 8710 Fax: +1 315 655 0445 DLISales@knowles.com



Novacap 25111 Anza Drive, Valencia, CA 91355 USA



Phone: +1 661 295 5920 Fax: +1 661 295 5928 NovacapSales@knowles.com



Syfer Technology Limited Old Stoke Road, Arminghall, Norwich, NR14 8SO UK



Phone: +44 1603 723300 Fax: +44 1603 723301 SyferSales@knowles.com



Voltronics Corporation 2250 Northwood Drive, Salisbury, MD 21801 USA



Phone: +1 410 749 2424 Fax: +1 443 260 2263 VoltronicsSales@knowles.com