

# E Series Evaluation Kit (Global)



The **E Series Evaluation Kit** is the best way to get started with the **E Series**, Particle's newest product family of industrialized cellular IoT modules. The Evaluation Kit includes an E Series Evaluation Board with 2G/3G global connectivity, a sample IoT sensor (temperature), and all the cellular accessories you need to build your first industrial-grade proof-of-concept on the Particle platform.

Excited to build your first prototypes with E Series modules? Add three spare E310 modules (2G/3G connectivity with global support) to your E Series Evaluation kit using the dropdown above.

### **E Series Evaluation Kit Contents**

All E Series Evaluation Kits include the following:

- E Series Evaluation Board (see below for details)
- 2,000 mAh Li-Po battery
- Taoglas Penta-band antenna (u.FL)
- USB Micro cable
- Grove temperature sensor
- SMA to u.FL adapter for connecting external SMA antennas

#### **E Series Product Features**

Particle's E Series is a new family of production-grade 2G, 3G, and LTE-enabled hardware that vastly reduces the cost and complexity of deploying cellular-connected IoT solutions at scale.

All E Series modules include the following features:

- Embedded SIM card, which resists vibration, corrosion, and mechanical failure
- Surface-mountable design, for PCB assembly in mass-production
- Industrial temperature range from -20 to 85C for deployment in hostile environments
- Future-compatible pinout with support for 2G and 3G today and a seamless transition to LTE
  M1 and NB1 in 2018
  - Fully certified design virtually eliminating the cost and complexity of RF and carrier compliance
- Built-in compatibility with Particle's development tools, messaging platform, and device management console

#### **E Series Evaluation Board Features**

The E Series Evaluation Kit contains a breakout board which provides easy access to all the pins and peripherals available on all E Series module variants. The Evaluation Board includes:

- Physical USB access for flashing and serial communications
- Li-Po battery connector for connecting external batteries

- Power barrel jack connector for external power

- MODE and RESET buttons

- Charge and status LEDs to appreciate device state at a glance

The E Series Evaluation board contains a soldered E310 module, which supports worldwide 2G and 3G connectivity and can be configured into a 2G only mode. All E Series variants will come in mass production quantities and will be available for purchase through our Wholesale Store in late October.

# Specs:

o STM32F205 ARM Cortex M3 microcontroller

o 1MB Flash, 128K RAM

Cellular modem: U-Blox SARA U-series (3G Global with 2G fallback)

o 36 pins total: 28 GPIOs (D0-D13, A0-A13), plus TX/RX, 2 GNDs, VIN, VBAT, WKP, 3V3, RST

Board dimensions: 36mm x 43mm

## Contents:

Global E310 module mounted on an evaluation board

3 Global E310 spare modules (with additional purchase)

o Grove temperature sensor

o 3 months of Particle's 1MB monthly data plan (processed upon SIM activation)

Li-Po battery (2000mAh)

Pinout reference card

o Taoglas Penta-band Cellular Antenna

## Basic Data Charges\*:

Particle's 1MB monthly data plan:

- 3 months included with kit


- \$2.99/month for 1MB (thousands of messages)

- No contracts, cancel anytime

## \$0.99/each additional MB

\*Data rates vary by country and by data usage, see here for full pricing and bulk discounts.

\*\* Continent compatibility is **simplified** and exceptions exist. Please be sure to check the full list of compatible countries for the location in which your product will be deployed.

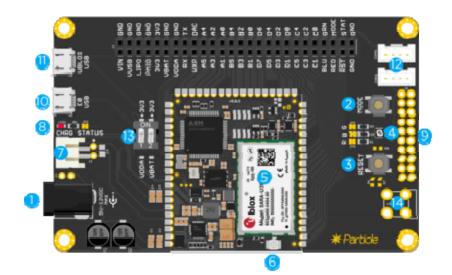

- DEXTERNAL DC POWER
- 2 NODE BUTTON
- RESET RUTTON
- A RGR LFD
- S UBLOX CELL MODULE
- 📵 u FLANT CONN.
- 🕖 L'Po BATT CONN.
- (B) CHARGE STATUS LED
- JTAG CONNECTOR
- F MODULF USB PORT.
- UBLOX JSB PORT
- B SENSOR PORTS
- **(B) VODA/VBAT SELECTOR**
- A ' SMA ANI. CONN.