

## SUMMARY

### # Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	0S
Termination type	Male solder
IP rating	50
Cable Ø	2.30 - 3.20 mm
Matching parts	ERN.0S.250.GTL
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFA*: Straight plug, cable collet
Keying	Circular (can rotate), plug has male contact(s)
Housing Material	PEEK (Polyetheretherketone) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C32: 2.3 - 3.2 mm
Variant	

### Performance

Configuration	0S.250 : 1 Coax (50 Ohm)
Insulator	T: PTFE
Rated Current	6 Amps

### Specifications

Contact Type:	Coaxial 50 Ohm (Solder)
Max. Matings:	1000
Contact Dia.:	0.9 mm (0.035in)
Bucket Dia.:	1 mm (0.039in)
Vtest:	3000 V (AC), 4200 V (DC)

Impedance: 50 Ohm

VSWR:  $1.02 + 0.25 \cdot f/\text{GHz}$

Cable type: RG 178 B/U, RG 196 A/U, RG 188 A/U, RG 316 B/U, RG 174 A/U, HF-2114, RG 122 /U

## Others

Endurance (Shell): 5000 mating cycles

Temp (min / max):  $-50^{\circ}\text{C} / +250^{\circ}\text{C}$

Humidity (max):  $\leq 95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]

Vibration: 15 g [10 Hz - 2000 Hz]

Shock Resistance: 100 g [ 6 ms]

Salt Spray Corrosion: >144 hr

Climatical Category: 50/175/21

Shielding (min): 75 dB (10 MHz)


Shielding (min): 40 dB (1 GHz)

IP Rating: 50

---

## DRAWINGS

### Draws

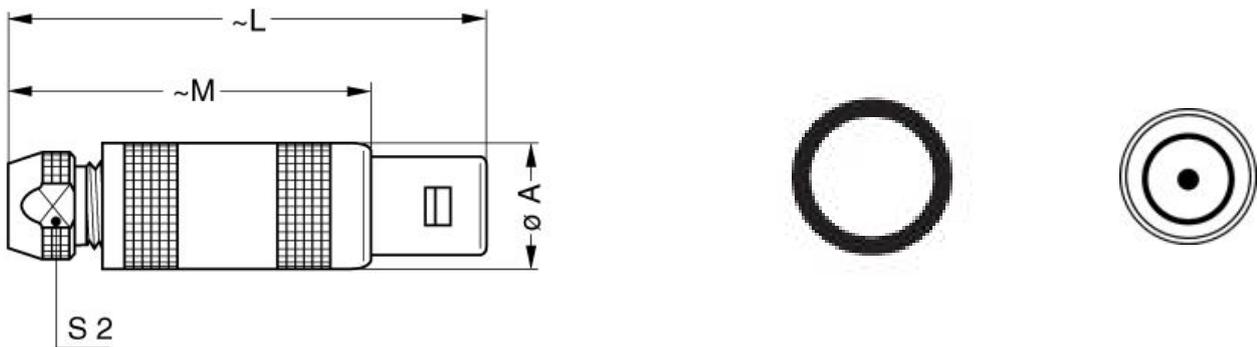

### Dimensions

	A	C	L	M	S2
mm.	9	4.2	34.5	24.5	6.5
in.	0,35	0,17	1,36	0,96	0,26

---

## RECOMMENDED BY LEMO

### Tools

Spanner wrench: DCD.05.005.PA065

